

# DURALIFT

ELEVATED WORK PLATFORM HIRE


PHONE 1300 580 580

## SPECIFICATION SHEET

A W P 3 0

# MAST LIFT

## Specifications

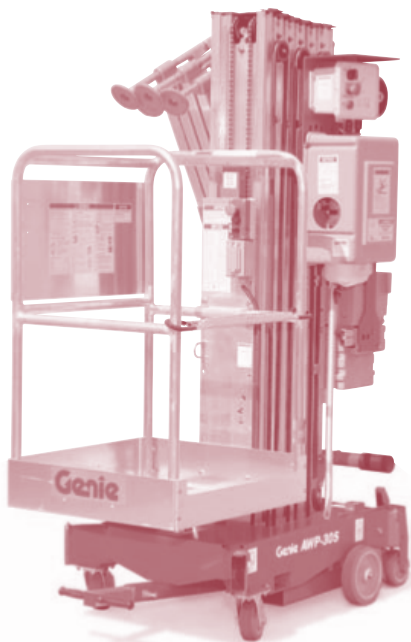

MODELS	AWP™-30S	
MEASUREMENTS	Metric	US
Working height*	11 m	35 ft 6 in
Platform height	9 m	29 ft 6 in
<b>A</b> Height - stowed (Standard, Narrow)	1.98 m	6 ft 6 in
stowed (RT)	2.01 m	6 ft 7 in
<b>B</b> tilted back** (Standard)	1.89 m	6 ft 2.5 in
<b>C</b> Length - stowed (Standard)	1.35 m	14 ft 5 in
stowed (Narrow)	1.40 m	4 ft 7 in
stowed (RT)	1.60 m	5 ft 3 in
<b>D</b> Length - tilted back**	2.11 m	6 ft 11 in
<b>E</b> Width (Standard)	0.74 m	2 ft 5 in
Width (Narrow)	0.56 m	1 ft 10 in
Width (RT)	0.76 m	2 ft 6 in
PRODUCTIVITY		
Lift capacity	159 kg	350 lbs
Indoor:		
<b>F G</b> Outrigger footprint (l/w) (Standard)	1.93 x 1.73 m	6 ft 4 in x 5 ft 8 in
Outrigger footprint (l/w) (Narrow/RT)	2.11 x 1.88 m	6 ft 11 in x 6 ft 2 in
<b>H</b> Corner access*** (Standard)	0.56 m	1 ft 10 in
Corner access*** (Narrow/RT)	0.70 m	2 ft 3.5 in
<b>I J</b> Wall access front/side (Standard)	0.20 x 0.53 m	8 in x 1 ft 9 in
Wall access front/side (Narrow/RT)	0.23 x 0.51 m	9 in x 1 ft 8 in
Outdoor:		
<b>F G</b> Outrigger footprint (l/w) (Standard)	2.97 x 2.79 m	9 ft 9 in x 9 ft 2 in
Outrigger footprint (l/w) (Narrow/RT)	3.30 x 3.45 m	10 ft 10 in x 11 ft 4 in
<b>H</b> Corner access*** (Standard)	0.69 m	2 ft 3 in
Corner access*** (Narrow/RT)	1.55 m	5 ft 1 in
<b>I J</b> Wall access front/side (Standard)	0.69 x 1.07 m	2 ft 3 in x 3 ft 6 in
Wall access front/side (Narrow/RT)	0.89 x 1.40 m	2 ft 11 in x 4 ft 7 in
Platform Dimensions:		
Standard	0.69 x 0.66 x 1.14 m 27 x 26 x 44.75 in	
Gated standard	0.69 x 0.66 x 1.14 m 27 x 26 x 44.75 in	
Gated ultra narrow	0.56 x 0.46 x 1.14 m 22 x 18 x 44.75 in	
Gated narrow	0.66 x 0.51 x 1.14 m 26 x 20 x 44.75 in	
Standard fiberglass	0.74 x 0.67 x 1.10 m 29 x 26.5 x 43.5 in	
Narrow fiberglass	0.66 x 0.56 x 1.10 m 26 x 22 x 43.5 in	
POWER		
Power source - AC or DC models	12V DC / 220/50-60 Hz AC	
WEIGHT		
AC models (Standard)	352 kg	777 lbs
AC models (Narrow/RT)	331 kg	729 lbs
DC models (Standard)	393 kg	867 lbs
DC models (Narrow/RT)	371 kg	818 lbs
Air motor (Standard)	352 kg	777 lbs
Air motor (Narrow/RT)	331 kg	729 lbs
STANDARDS COMPLIANCE	ANSI A92.3, CSA B354.1, CE Compliance,	

\* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.

\*\* Tilt back height with standard platform. For tilt back height with other platforms, please contact your sales representative.

\*\*\* Corner of platform top rail to corner of wall with ability to rotate leveling jack handle.